


SPECIFICATION

Current Rate:0.5 AMP
 Insulation Resistance:500M Ω Min
 Contact Resistance:30m Ω Max
 Dielectric voltage:100V AC for one minute
 Operation Temperature:-55°C to +85°C
 Soldering Temperature:260°C / 5 Sec


MATERIAL

Insulator:Glass Fiber Nylon 46,UL94V-0
 Contact Pin:Phosphor Bronze,Tin plated

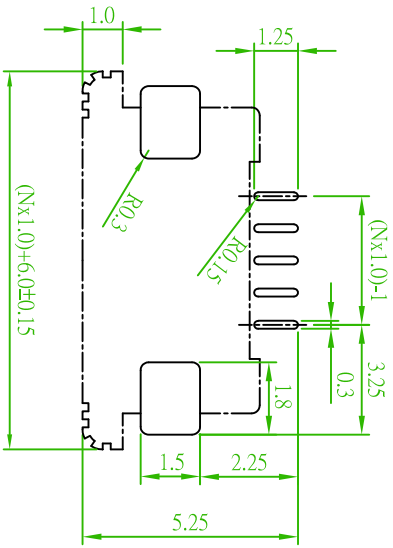


Recommended PCB Layout
 (PCB TOLERANCE ±0.05)


ORDER INFORMATION

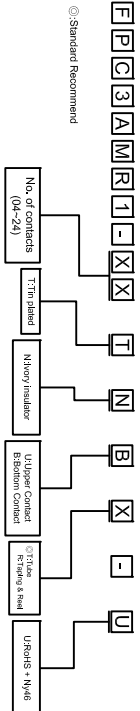

© Standard Requirement

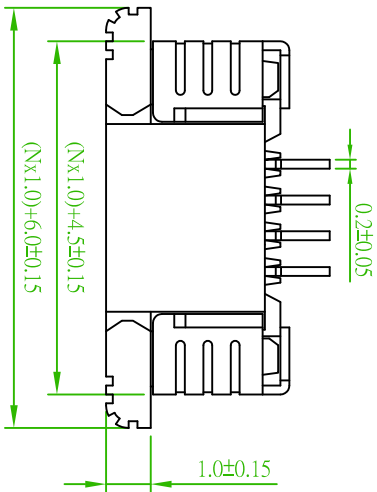

SECT X-X'

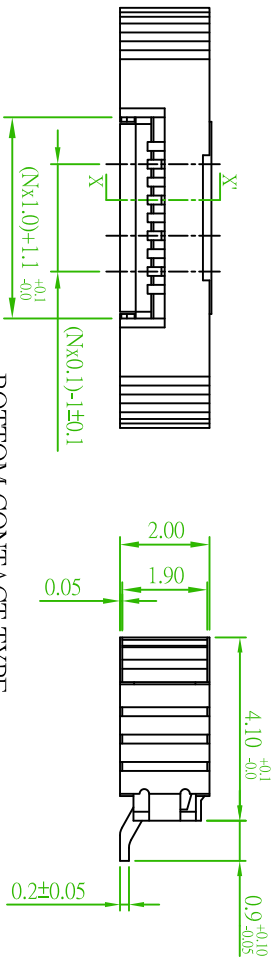

BOTTOM CONTACT TYPE

品名 TITLE		FPC/FFC 1.0mm ZIF SMT TYPE SIDE ENTRY	
品號 PART NO.	FPC3AMR1-XX-B-U	日期 DATE	02/06/2006
圖號 DRAWING NO.	FPC3AMR1-XX-B-U	繪圖 DRAWN	Kent
客戶品號 CUSTOMER P/N		版本 REV.	A
公差 TOLERANCE	.X ±0.15 .XX ±0.1	比例 SCALE	FREE
		單位 UNIT	mm
		核對 CHECKED	Paul
		核准 APPROVED	James

耀德企業有限公司
 Amitek Technology Co., Ltd.
 TEL:886-2-2268-8936
 FAX:886-2-2268-8935

REV.	DESCRIPTION	DATE