


SPECIFICATION

Current Rate:0.5 AMP
 Insulation Resistance:500M Ω Min
 Contact Resistance:30m Ω Max
 Dielectric voltage:100V AC for one minute
 Operation Temperature:-55°C to +85°C


MATERIAL

Insulator:Glass Fiber Nylon 46,UL94V-0
 Contact Pin:Phosphor Bronze,Gold plated

ORDER INFORMATION




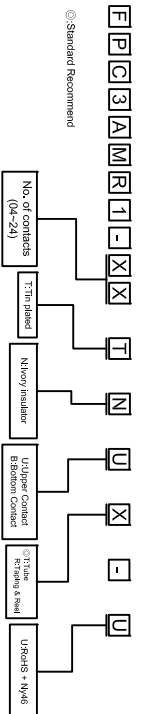


©Standard Recommendation

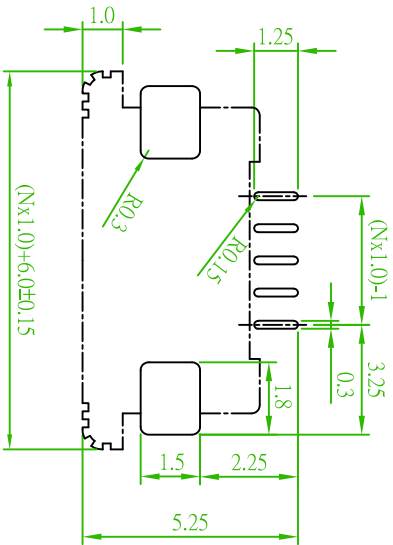

FPC/FPC INSERT DIRECTION

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

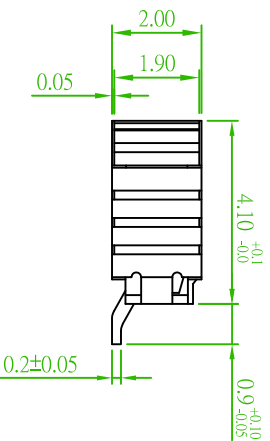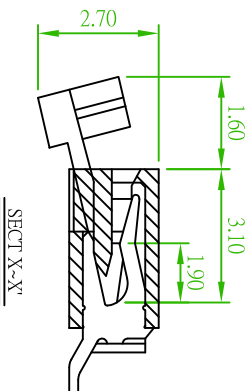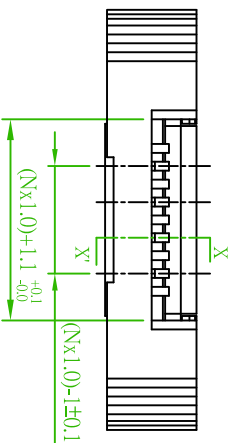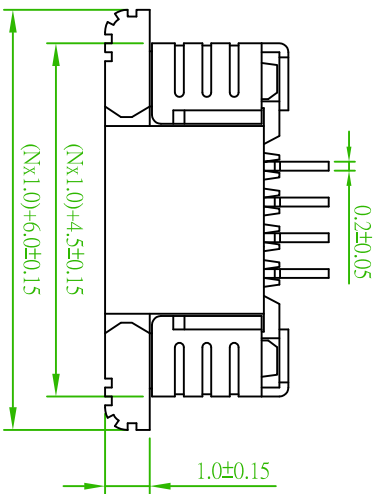

UPPER CONTACT TYPE

品名 TITLE		FPC/FPC 1.0mm ZIF SMT TYPE SIDE ENTRY			
品號 PART NO.		FPC3AMR1-XX-U-U			
圖號 DRAWING NO.		FPC3AMR1-XX-U-U			
客戶品號 CUSTOMER P/N					
公差 TOLERANCE		.X ±0.15 .XX ±0.1		單位 UNIT	mm
日期 DATE		繪圖 DRAWN		核對 CHECKED	
02/14/2006		Kent		Paul	
版本 REV.		A		核對 CHECKED	
比例 SCALE		FREE		核對 CHECKED	
圖號 DRAWING NO.		A		核對 CHECKED	
客戶品號 CUSTOMER P/N				核對 CHECKED	
公差 TOLERANCE		.X ±0.15 .XX ±0.1		核對 CHECKED	
單位 UNIT		mm		核對 CHECKED	
日期 DATE		02/14/2006		核對 CHECKED	
繪圖 DRAWN		Kent		核對 CHECKED	
核對 CHECKED		Paul		核對 CHECKED	
核對 CHECKED		James		核對 CHECKED	
DESCRIPTION		DATE			
REV.		DATE			
ARPA		DATE			

