


JAYFOIL SCREENED DATA CABLES

J0702244 Foil Screened 0,22mm² PVC Cable 440V

- a. 0,22mm² (7/0,20mm) tinned copper conductors
 - b. PVC insulation
 - c. Tinned copper drain wire
 - d. Overall aluminium-mylar® foil screen
 - e. PVC sheath - grey
- 440V grade
 - Max. 1 amp.
 - Colour coded cores

The overall foil screen provides 100% coverage thus protecting against external electrical interference on low and medium frequencies.

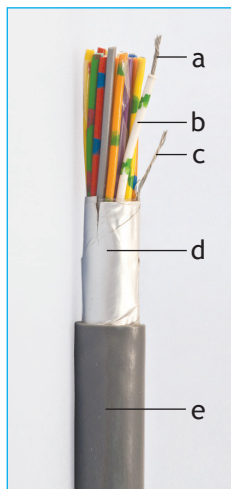

Jaycor Part Number	No. of cores	Nominal O.D. (mm)
J070224402	2	3,2
J070224403	3	3,6
J070224404	4	4
J070224405	5	4,2
J070224406	6	4,6
J070224409	9	5,3
J070224408	8	5,1
J070224412	12	6,2
J070224416	16	7,1
J070224418	18	7,7
J070224425	25	9,1
J070224436	36	10,3
J070224450	50	11,7
J070224460	60	12,7
J070224472	72	14,2
J0702244100	100	17,3

The above cable types are also available with different core combinations.