


JAYFOIL SCREENED DATA CABLES

J0705044 Foil Screened 0,5mm² PVC Cable 440V

- a. 0,5mm² (16/0,20mm) tinned copper conductors
 - b. PVC insulation
 - c. Tinned copper drain wire
 - d. Overall aluminium-mylar® foil screen
 - e. PVC sheath - grey
- 440V grade
 - Max. 3 amp.
 - Colour coded cores

The overall foil screen provides 100% coverage thus protecting against external electrical interference on low and medium frequencies.

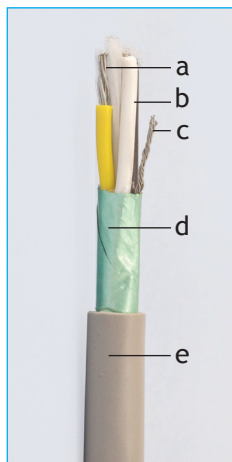

Jaycor Part Number	No. of cores	Nominal O.D. (mm)
J070504402	2	5,7
J070504403	3	6,2
J070504404	4	6,5
J070504405	5	6,9
J070504406	6	7,2
J070504408	8	8,2
J070504412	12	9,7
J070504416	16	11,3
J070504418	18	11,8
J070504425	25	13,7
J070504436	36	16,5
J070504450	50	19
J070504460	60	19,5
J070504472	72	20,5
J0705044100	100	22,5

The above cable types are also available with different core combinations.