


# PVC PANEL WIRES

## J13 PVC Panel Wires - Untinned Conductors

- a. Multistrand plain copper conductors
  - b. PVC insulation
- 300/500V up to 1,5mm<sup>2</sup>
  - 600/1000V above 1,5mm<sup>2</sup>
  - Temp.rating: 0°C to +80 °C
  - xx - indicate wire colour required

Connecting wires for internal wiring of electronic and other equipment.

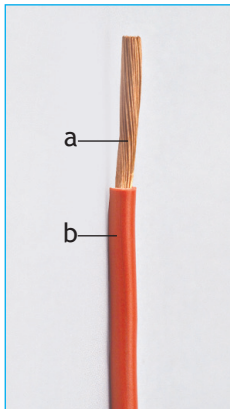

Jaycor Part Number	Conductor Size (mm <sup>2</sup> )	Strandings No / mm	Nominal O.D. (mm)
J130503/501U-xx	0,5	14/0,21	2,1
J130753/501U-xx	0,75	20/0,21	2,7
J131003/501U-xx	1,0	28/0,21	2,9
J131503/501U-xx	1,5	41/0,21	3,2
J132506/1001U-xx	2,5	66/0,21	3,6
J134006/1001U-xx	4	48/0,31	4,5
J136006/1001U-xx	6	72/0,31	5,1
J1310006/1001U-xx	10	126/0,31	6,1
J1316006/1001U -xx	16	200/0,31	7,3
J1325006/1001U-xx	25	312/0,31	9,2
J1335006/1001U-xx	35	440/0,31	9,8
J1350006/1001U-xx	50	632/0,31	12,4
J1370006/1001U-xx	70	904/0,31	14