

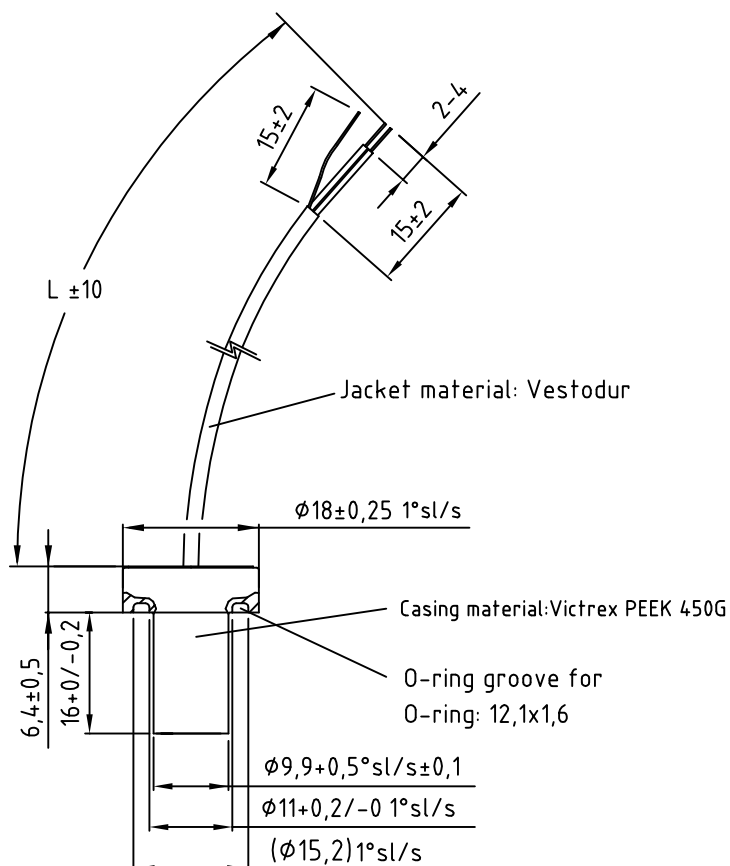


Transducer Cable Length

| Part no. | L [mm] |
|----------|--------|
| 20011 | 120±10 |
| 20012 | 260±10 |
| 20013 | 300±10 |
| 20014 | 360±10 |

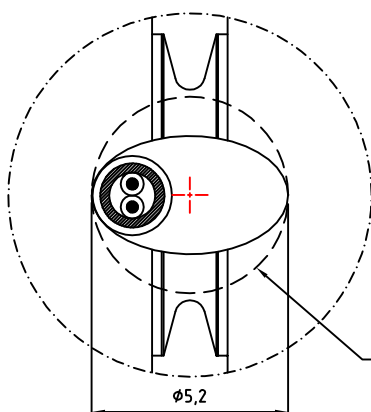

A 5:1



Signal Properties
Amplitude: minimum 0,193 Vp-p
Centerfrequency: 4MHz $\pm 15\%$

| Def.-nr | Ant. | D-Flow Technology part number: 20-011 | | | | Beskrivning | Kvantitet | |
|---------|------|---------------------------------------|----|------|---------|-------------|-------------------------------------------|------------------|
| Konstr. | ML | Ritad | ML | Kop. | Konstr. | Stand. | Gedk. | Skala 1:1 |
| D-Flow | | | | | | | Ultrasonic Transducer 4MHz PEEK Casing | Ersätter 110525 |
| | | | | | | | | Ersatt av 110928 |
| | | | | | | | Ritm.-nr | cdp06005-07 |